


Concrete Hose & Accessories



ABBOTT RUBBER COMPANY, INC.

PRODUCT CATALOG - JANUARY 2024

BOSTON MARAUDER™ - TEXTILE REINFORCED

Service/Application:

Reliable concrete pumping hose connection that requires flexibility and durability. For use directly off pump for Concrete, Plaster & Grout applications. Lengths up to 100 FT. 2:1 design factor.

Construction:

Black abrasion resistant natural rubber tube, spiral plies of high-strength synthetic textile with anti-static copper wire. Cover is pin-pricked synthetic rubber. Hose exceeds ASME B30.27-2014.

Temperature Range:

-40°F up to +158°F



PART #	SIZE	W/P (PSI)	BAR	DESCRIPTION	WEIGHT (LBS/FT)
1673-24-HDHD	1-1/2"	1233#	85	1-1/2" MARAUDER TEXTILE CONCRETE PUMPING HOSE	1.22
1673-32-HDHD	2"	1233#	85	2" MARAUDER TEXTILE CONCRETE PUMPING HOSE	1.62
1673-40-HDHD	2-1/2"	1233#	85	2-1/2" MARAUDER TEXTILE CONCRETE PUMPING HOSE	2.02
1673-48-HDHD	3"	1233#	85	3" MARAUDER TEXTILE CONCRETE PUMPING HOSE	2.45
1673-56-HDHD	3-1/2"	1233#	85	3-1/2" MARAUDER TEXTILE CONCRETE PUMPING HOSE	2.82
1673-64-HDHD	4"	1233#	85	4" MARAUDER TEXTILE CONCRETE PUMPING HOSE	3.18
1673-80-HDHD	5"	1233#	85	5" MARAUDER TEXTILE CONCRETE PUMPING HOSE - HD	4.28
1673-80-MEME	5"	1233#	85	5" MARAUDER TEXTILE CONCRETE PUMPING HOSE - METRIC	4.28

CONTINENTAL ALLCRETE - TEXTILE REINFORCED

Service/Application:

Soundly constructed hose for use with concrete and soil pumps. Hose is designed to meet some of the strongest requirements at construction site. For use as a flexible connection between pumping equipment and hard piping. Lengths up to 100 FT. 2:1 design factor.

Construction:

Black abrasion resistant SBR rubber tube, spiral plies of high-strength polyester. Cover is abrasion resistant and ozone resistant rubber. Hose exceeds ASME B30.27-2009.

Temperature Range:

-40°F up to +194°F



PART #	SIZE	W/P (PSI)	BAR	DESCRIPTION	WEIGHT (LBS/FT)
1670-24-HDHD	1-1/2"	1233#	85	1-1/2" ALLCRETE TEXTILE CONCRETE PUMPING HOSE	1.26
1670-32-HDHD	2"	1233#	85	2" ALLCRETE TEXTILE CONCRETE PUMPING HOSE	1.58
1670-40-HDHD	2-1/2"	1233#	85	2-1/2" ALLCRETE TEXTILE CONCRETE PUMPING HOSE	2.12
1670-48-HDHD	3"	1233#	85	3" ALLCRETE TEXTILE CONCRETE PUMPING HOSE	2.59
1670-64-HDHD	4"	1233#	85	4" ALLCRETE TEXTILE CONCRETE PUMPING HOSE	3.39
1670-80-HDHD	5"	1233	85	5" ALLCRETE TEXTILE CONCRETE PUMPING HOSE - HD	4.61
1670-80-MEME	5"	1233#	85	5" ALLCRETE TEXTILE CONCRETE PUMPING HOSE - METRIC	4.61

BOSTON MARAUDER™ HD - WIRE REINFORCED

Service/Application:

Enhanced wire-reinforced concrete pumping hose to handle the most demanding applications. Hose is designed for higher pressure applications where flexibility is also a requirement. Impressive 2,900 PSI Burst. Lengths up to 100 FT. 2:1 design factor.

Construction:

Black abrasion resistant natural rubber tube, spiral plies of high-strength synthetic textile with anti-static copper wire. Cover is pin-pricked synthetic rubber. Hose exceeds ASME B30.27-2014.

Temperature Range:

-40°F up to +158°F



PART #	SIZE	W/P (PSI)	BAR	DESCRIPTION	WEIGHT (LBS/FT)
1677-32-HDHD	2"	1233#	85	2" MARAUDER HD WIRE REINFORCED CONCRETE PUMPING HOSE	2.04
1677-40-HDHD	2-1/2"	1233#	85	2-1/2" MARAUDER HD WIRE REINFORCED CONCRETE PUMPING HOSE	3.01
1677-48-HDHD	3"	1233#	85	3" MARAUDER HD WIRE REINFORCED CONCRETE PUMPING HOSE	3.67
1677-64-HDHD	4"	1233#	85	4" MARAUDER HD WIRE REINFORCED CONCRETE PUMPING HOSE	5.68
1677-80-HDHD	5"	1233#	85	5" MARAUDER HD WIRE REINFORCED CONCRETE PUMPING HOSE - HD	6.47
1677-80-MEME	5"	1233#	85	5" MARAUDER HD WIRE REINFORCED CONCRETE PUMPING HOSE - METRIC	6.47

CONTINENTAL ALLCRETE - WIRE REINFORCED

Service/Application:

For handling wet concrete with high head pressures at the critical flex areas of a concrete boom truck and as a discharge hose on the delivery end of high-pressure concrete pumps. Exceeds ASME B30.27-2009. Lengths up to 100 FT. 2:1 design factor.

Construction:

Black Chemituf® Synthetic Rubber tube, spiral plies of high-strength wire. Cover is abrasion and ozone resistant SBR rubber. Hose exceeds ASME B30.27-2009.

Temperature Range:

-40°F up to +194°F



PART #	SIZE	W/P (PSI)	BAR	DESCRIPTION	WEIGHT (LBS/FT)
1678-32-HDHD	2"	1233#	85	2" ALLCRETE WIRE REINFORCED CONCRETE PUMPING HOSE	2.75
1678-40-HDHD	2-1/2"	1233#	85	2-1/2" ALLCRETE WIRE REINFORCED CONCRETE PUMPING HOSE	3.28
1678-48-HDHD	3"	1233#	85	3" ALLCRETE WIRE REINFORCED CONCRETE PUMPING HOSE	3.80
1678-64-HDHD	4"	1233#	85	4" ALLCRETE WIRE REINFORCED CONCRETE PUMPING HOSE	4.90
1678-80-HDHD	5"	1233#	85	5" ALLCRETE WIRE REINFORCED CONCRETE PUMPING HOSE - HD	5.98
1678-80-MEME	5"	1233#	85	5" ALLCRETE WIRE REINFORCED CONCRETE PUMPING HOSE - METRIC	5.98

CPG MUD JACK HOSE W/ NPT THREADED ENDS

Service/Application:

Concrete, Plaster, Grout (CPG) hose for mud Jacking, concrete leveling applications. Assembled with welded carbon steel schedule 80 heat treated NPT Threaded ends. 3:1 design factor.

Construction:

Black abrasion resistant natural rubber tube, spiral plies of high-strength synthetic textile with anti-static copper wire. Cover is pin-pricked synthetic rubber. Hose exceeds ASME B30.27-2014.

Temperature Range:

-40°F up to +194°F



PART #	SIZE	W/P (PSI)	DESCRIPTION	WEIGHT (LBS/FT)
1673-16-MM	1"	800#	1" TEXTILE REINFORCED CPG HOSE W/ THREADED NPT ENDS	0.69
1673-20-MM	1-1/4"	800#	1-1/4" TEXTILE REINFORCED CPG HOSE W/ THREADED NPT ENDS	1.26
1673-24-MM	1-1/2"	800#	1-1/2" TEXTILE REINFORCED CPG HOSE W/ THREADED NPT ENDS	1.58
1673-32-MM	2"	800#	2" TEXTILE REINFORCED CPG HOSE W/ THREADED NPT ENDS	2.12

GUNITE HOSE

Service/Application:


Hose is used in the handling of refractory type sand, dry cement as well as other abrasive mixtures up to 150 PSI. Also used in lining high temperature furnaces and chimneys. 3:1 design factor.

Construction:

High strength 1/4" thick pure gum tube. Cover is EPDM, pin pricked and tan color. Reinforced with a 2-ply synthetic fabric with a static wire.

Temperature Range:

-40°F up to +180°F

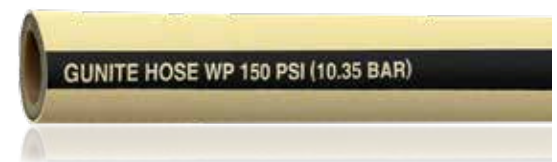

PART #	SIZE	W/P (PSI)	DESCRIPTION	WEIGHT (LBS/FT)
1675-1500	1-1/2"	150#	1-1/2" GUNITE SAND PUMPING HOSE - 2.38" O.D.	1.10
1675-1625	1-5/8"	150#	1-5/8" GUNITE SAND PUMPING HOSE - 2.52" O.D.	1.40
1675-2000	2"	150#	2" GUNITE SAND PUMPING HOSE - 2.88" O.D.	1.65
1675-2500	2-1/2"	150#	2-1/2" GUNITE SAND PUMPING HOSE - 3.88" O.D.	2.30

GUNITE HOSE COUPLING (3-PC)



PART #	DESCRIPTION
GC150	1-1/2" GUNITE HOSE COUPLING - STEEL
GC200	2" GUNITE HOSE COUPLING - STEEL

SANDBLAST HOSE ASSEMBLIES

For conducting sand, steel shot or other sharp abrasives at high velocity. Hose available with nozzle holders and hose ends or in bulk quantities.

PART #	DESCRIPTION
1660-0500	1/2" SANDBLAST HOSE ASSEMBLY - 25/50/100 FT
1660-0750	3/4" SANDBLAST HOSE ASSEMBLY - 25/50/100 FT
1660-1000	1" SANDBLAST HOSE ASSEMBLY - 25/50 /100 FT
1660-1250	1-1/4" SANDBLAST HOSE ASSEMBLY - 25/50/100 FT
1660-1500	1-1/2" SANDBLAST HOSE ASSEMBLY - 25/50/100 FT
1600-2000	2" SANDBLAST HOSE ASSEMBLY - 25/50/100 FT



LAYFLAT URETHANE MORTAR HOSE

For high pressure vertical placement applications or as a boom hose for tight to reach places.

PART #	DESCRIPTION
1679-64-HD/10	4" X 10 FT 1250 PSI LAYFLAT MORTAR HOSE - HD X OPEN
1679-64-HD/12	4" X 12 FT 1250 PSI LAYFLAT MORTAR HOSE - HD X OPEN
1679-64-HD/15	4" X 15 FT 1250 PSI LAYFLAT MORTAR HOSE - HD X OPEN
1679-64-HD/20	4" X 20 FT 1250 PSI LAYFLAT MORTAR HOSE - HD X OPEN
1679-80-ME/10	5" X 10 FT 1250 PSI LAYFLAT MORTAR HOSE - METRIC X OPEN
1679-80-ME/12	5" X 12 FT 1250 PSI LAYFLAT MORTAR HOSE - METRIC X OPEN
1679-80-ME/15	5" X 15 FT 1250 PSI LAYFLAT MORTAR HOSE - METRIC X OPEN



DRY CEMENT DISCHARGE HOSE

For pneumatic transfer of cement or dry powder under low pressure and for use with abrasive slurries.

PART #	DESCRIPTION
1750-4006	4" X 3/16" TUBE DRY MATERIAL DISCHARGE - 75 PSI
1750-4008	4" X 1/4" TUBE DRY MATERIAL DISCHARGE - 75 PSI
1750-5008	5" X 1/4" TUBE DRY MATERIAL DISCHARGE - 75 PSI
1750-6008	6" X 1/4" TUBE DRY MATERIAL DISCHARGE - 75 PSI



ELEPHANT TRUNK HOSE

Premium-quality hose deal for cement and abrasives gravity flow. Hose typically connects to a hopper feed.

PART #	DESCRIPTION
1755-8000	8" ELEPHANT TRUNK HOSE W/ 1/8" TUBE - 50 PSI
1755-10000	10" ELEPHANT TRUNK HOSE W/ 1/8" TUBE - 50 PSI
1755-12000	12" ELEPHANT TRUNK HOSE W/ 1/8" TUBE - 50 PSI
1755-14000	14" ELEPHANT TRUNK HOSE W/ 1/8" TUBE - 50 PSI
1755-16000	16" ELEPHANT TRUNK HOSE W/ 1/8" TUBE - 50 PSI



CONCRETE STEEL REDUCER PIPE

PART #	DESCRIPTION	WEIGHT
CRP-2015-18-HD	2" X 1-1/2" HD STEEL REDUCER PIPE - 18" LENGTH	9 LBS
CRP-2015-18-HDVIC	2" X 1-1/2" HD X V-GROOVE STEEL REDUCER PIPE - 18" LENGTH	9 LBS
CRP-2520-28-HD	2-1/2" X 2" HD STEEL REDUCER PIPE - 28" LENGTH	19 LBS
CRP-2520-28-VIC	2-1/2" X 2" V-GROOVE STEEL REDUCER PIPE - 28" LENGTH	18 LBS
CRP-2520-28-HDVIC	2-1/2" X 2" HD X V-GROOVE STEEL REDUCER PIPE - 28" LENGTH	19 LBS
CRP-2520-36-HD	2-1/2" X 2" HD STEEL REDUCER PIPE - 36" LENGTH	23 LBS
CRP-2520-36-VIC	2-1/2" X 2" V-GROOVE STEEL REDUCER PIPE - 36" LENGTH	21 LBS
CRP-2520-36-HDGR	2-1/2" X 2" HD X V-GROOVE STEEL REDUCER PIPE - 36" LENGTH	23 LBS
CRP-3020-12-HD	3" X 2" HD STEEL REDUCER PIPE - 12" LENGTH	9 LBS
CRP-3020-12-HDGR	3" X 2" HD X V-GROOVE STEEL REDUCER PIPE - 12" LENGTH	9 LBS
CRP-3020-28-HD	3" X 2" HD STEEL REDUCER PIPE - 28" LENGTH	21 LBS
CRP-3020-28-VIC	3" X 2" V-GROOVE STEEL REDUCER PIPE - 28" LENGTH	18 LBS
CRP-3020-28-HDVIC	3" X 2" HD X V-GROOVE STEEL REDUCER PIPE - 28" LENGTH	21 LBS
CRP-3020-36-HD	3" X 2" HD STEEL REDUCER PIPE - 36" LENGTH	27 LBS
CRP-3020-36-VIC	3" X 2" V-GROOVE STEEL REDUCER PIPE - 36" LENGTH	25 LBS
CRP-3020-36-HDGR	3" X 2" HD X V-GROOVE STEEL REDUCER PIPE - 36" LENGTH	27 LBS
CRP-3025-12-HD	3" X 2-1/2" HD STEEL REDUCER PIPE - 12" LENGTH	10 LBS
CRP-3025-28-HD	3" X 2-1/2" HD STEEL REDUCER PIPE - 28" LENGTH	22 LBS
CRP-3025-28-VIC	3" X 2-1/2" V-GROOVE STEEL REDUCER PIPE - 28" LENGTH	20 LBS
CRP-3025-28-HDVIC	3" X 2-1/2" HD X V-GROOVE STEEL REDUCER PIPE - 28" LENGTH	22 LBS
CRP-3025-36-HD	3" X 2-1/2" HD STEEL REDUCER PIPE - 36" LENGTH	27 LBS
CRP-3025-36-VIC	3" X 2-1/2" V-GROOVE STEEL REDUCER PIPE - 36" LENGTH	27 LBS
CRP-3025-36-HDGR	3" X 2-1/2" HD X V-GROOVE STEEL REDUCER PIPE - 36" LENGTH	27 LBS
CRP-4020-36-HD	4" X 2" HD STEEL REDUCER PIPE - 36" LENGTH	28 LBS
CRP-4025-36-HD	4" X 2-1/2" HD STEEL REDUCER PIPE - 36" LENGTH	28 LBS
CRP-4030-12-HD	4" X 3" HD STEEL REDUCER PIPE - 12" LENGTH	13 LBS
CRP-4030-36-HD	4" X 3" HD STEEL REDUCER PIPE - 36" LENGTH	33 LBS
CRP-5030-36-HD	5" X 3" HD STEEL REDUCER PIPE - 36" LENGTH	37 LBS
CRP-5030-36-MEHD	5" X 3" METRIC X HD STEEL REDUCER PIPE - 36" LENGTH	47 LBS
CRP-5040-36-HD	5" X 4" HD STEEL REDUCER PIPE - 36" LENGTH	47 LBS
CRP-5040-12-MEHD	5" X 4" METRIC X HD STEEL REDUCER PIPE - 12" LENGTH	16 LBS
CRP-5040-36-MEHD	5" X 4" METRIC X HD STEEL REDUCER PIPE - 36" LENGTH	46 LBS



90 DEGREE REDUCING STEEL ELBOW

PART #	DESCRIPTION	WEIGHT
CRPE90-4030-HDGR	4" X 3" HD X V-GROOVE - 90 DEGREE STEEL REDUCER PIPE	20 LBS
CRPE90-4030-HDHD	4" X 3" HD X HD - 90 DEGREE STEEL REDUCER PIPE	20 LBS
CRPE90-5030-HDHD	5" X 3" HD X HD - 90 DEGREE STEEL REDUCER PIPE	25 LBS
CRPE90-5040-HDHD	5" X 4" HD X HD - 90 DEGREE STEEL REDUCER PIPE	27 LBS
CRPE90-5030-MEHD	5" X 3" METRIC X HD - 90 DEGREE STEEL REDUCER PIPE	25 LBS
CRPE90-5040-MEHD	5" X 4" METRIC X HD - 90 DEGREE STEEL REDUCER PIPE	27 LBS



45 DEGREE STEEL PIPE BEND

PART #	DESCRIPTION	WEIGHT
CPE45-200-13-HD	2" X 13" RADIUS 45 DEGREE BEND - HD ENDS	8 LBS
CPE45-200-48-HD	2" X 48" RADIUS 45 DEGREE BEND - HD ENDS	25 LBS
CPE45-250-16-HD	2-1/2" X 16" RADIUS 45 DEGREE BEND - HD ENDS	10 LBS
CPE45-250-48-HD	2-1/2" X 48" RADIUS 45 DEGREE BEND - HD ENDS	27 LBS
CPE45-300-16-HD	3" X 16" RADIUS 45 DEGREE BEND - HD ENDS	10 LBS
CPE45-300-48-HD	3" X 48" RADIUS 45 DEGREE BEND - HD ENDS	35 LBS
CPE45-400-18-HD	4" X 18" RADIUS 45 DEGREE BEND - HD ENDS	16 LBS
CPE45-400-48-HD	4" X 48" RADIUS 45 DEGREE BEND - HD ENDS	46 LBS
CPE45-500-14-HD	5" X 14" RADIUS 45 DEGREE BEND - HD ENDS	25 LBS
CPE45-500-18-HD	5" X 18" RADIUS 45 DEGREE BEND - HD ENDS	28 LBS
CPE45-500-24-HD	5" X 24" RADIUS 45 DEGREE BEND - HD ENDS	32 LBS
CPE45-500-48-HD	5" X 48" RADIUS 45 DEGREE BEND - HD ENDS	61 LBS



90 DEGREE STEEL PIPE BEND

PART #	DESCRIPTION	WEIGHT
CPE90-200-16-HD	2" X 16" RADIUS 45 DEGREE BEND - HD ENDS	11 LBS
CPE90-200-24-HD	2" X 24" RADIUS 45 DEGREE BEND - HD ENDS	25 LBS
CPE90-250-16-HD	2-1/2" X 16" RADIUS 45 DEGREE BEND - HD ENDS	13 LBS
CPE90-250-48-HD	2-1/2" X 48" RADIUS 45 DEGREE BEND - HD ENDS	30 LBS
CPE90-300-16-HD	3" X 16" RADIUS 45 DEGREE BEND - HD ENDS	18 LBS
CPE90-300-48-HD	3" X 48" RADIUS 45 DEGREE BEND - HD ENDS	35 LBS
CPE90-400-18-HD	4" X 18" RADIUS 45 DEGREE BEND - HD ENDS	29 LBS
CPE90-400-48-HD	4" X 48" RADIUS 45 DEGREE BEND - HD ENDS	40 LBS
CPE90-500-14-HD	5" X 14" RADIUS 45 DEGREE BEND - HD ENDS	42 LBS
CPE90-500-24-HD	5" X 24" RADIUS 45 DEGREE BEND - HD ENDS	64 LBS
CPE90-500-48-HD	5" X 48" RADIUS 45 DEGREE BEND - HD ENDS	131 LBS



WALL HOOKS

PART #	DESCRIPTION
CWH20	2" STEEL WALL HOOK - HD
CWH250	2-1/2" STEEL WALL HOOK - HD



180° CUSTOM PIPE BEND ELBOW HD X HD

PART #	DESCRIPTION
CPE180-200-HD	2" HD X 180 DEGREE ELBOW 13 CLR W/ BRACE & SAFETY EYE
CPE180-300-HD	3" HD 180 DEGREE ELBOW 16 CLR W/ BRACE & SAFETY EYE
CPE180-400-HD	4" HD 180 DEGREE ELBOW 18 CLR W/ BRACE & SAFETY EYE
CPE180-500-HD	5" HD 180 DEGREE ELBOW 24 CLR W/ BRACE & SAFETY EYE



ACME STYLE SHOTCRETE NOZZLE

PART #	DESCRIPTION	WEIGHT
SCN-HD-150-AM	1-1/2" HD ACME STYLE NOZZLE COMPLETE	6 LBS
SCN-HD-200-AM	2" HD ACME STYLE NOZZLE COMLPETE	8 LBS

SINGLE PORT HOTCRETE NOZZLE

PART #	DESCRIPTION	WEIGHT
SCN-HD-150	1-1/2" HD STYLE NOZZLE COMPLETE	7 LBS
SCN-HD-200	2" HD STYLE NOZZLE COMLPETE	8 LBS
SCN-HD-250	2-1/2" HD STYLE NOZZLE COMPLETE	10 LBS

DUAL PORT SHOTCRETE NOZZLE

PART #	DESCRIPTION	WEIGHT
SCN-HD-200DP	2" HD STYLE NOZZLE W/ DUAL PORTS	10 LBS
SCN-HD-250DP	2-1/2" HD STYLE NOZZLE W/ DUAL PORTS	12 LBS



REPLACEMENT NOZZLE TIPS

PART #	SIZE
SCNRT-150	1-1/2"
SCNRT-200	2"
SCNRT-250	2-1/2"



CLEAN OUT SPONGE BALLS

SIZE	SOFT	MEDIUM	HARD
1"	SCB-100-S	SCB-100-M	SCB-100-H
1-1/2"	SCB-150-S	SCB-150-M	SCB-150-H
2"	SCB-200-S	SCB-200-M	SCB-200-H
2-1/2"	SCB-250-S	SCB-250-M	SCB-250-H
3"	SCB-300-S	SCB-300-M	SCB-300-H
4"	SCB-400-S	SCB-400-M	SCB-400-H
5"	SCB-500-S	SCB-500-M	SCB-500-H
6"	SCB-600-S	SCB-600-M	SCB-600-H



REPLACEMENT NOZZLE BODY

PART #	DESCRIPTION
SCNB-150-S	1-1/2" HD
SCNB-200-S	2" HD
SCNB-250-S	2-1/2" HD

SPONGE BALL CATCHER



PART #	SIZE
SCBC-200-HD	1-1/2"
SCBC-250-HD	2-1/2"
SCBC-300-HD	3"
SCBC-400-HD	4"
SCBC-500-HD	5"

ACME STYLE CLAMP

PART #	DESCRIPTION	WEIGHT
CG20GR-AM	2" V-GROOVE ACME STYLE CLAMP W/ GASKET	3 LBS
CG20GR-AM	2" V-GROOVE ACME STYLE CLAMP W/ 2" CAVITY GASKET	3 LBS
CG20HD-AM	2" HD ACME STYLE CLAMP W/ GASKET	4 LBS
CG25GR-AM	2-1/2" V-GROOVE ACME STYLE CLAMP W/ GASKET	4 LBS
CG25HD-AM	2-1/2" HD ACME STYLE CLAMP W/ GASKET	5 LBS
CG30HD-AM	3" HD ACME STYLE CLAMP W/ GASKET	6 LBS
CG40HD-AM	4" HD ACME STYLE CLAMP W/ GASKET	9 LBS
CG50HD-AM	5" HD ACME STYLE CLAMP W/ GASKET	12 LBS
CG50ME-AM	5" METRIC ACME STYLE CLAMP W/ GASKET	12 LBS



HEAVY DUTY NON-ADJUSTABLE CLAMP - CF STYLE

PART #	DESCRIPTION	WEIGHT
SC15HD-CF	1-1/2" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET HD	3 LBS
SC20HD-CF	2" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET HD	4 LBS
SC25HD-CF	2-1/2" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET HD	5 LBS
SC30HD-CF	3" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET HD	8 LBS
SC40HD-CF	4" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET HD	12 LBS
SC50HD-CF	5" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET HD	15 LBS
SC50ME-CF	5" NON-ADJUSTABLE CF STYLE CLAMP W/ GASKET ME	15 LBS



HEAVY DUTY ADJUSTABLE CLAMP- CF STYLE

PART #	DESCRIPTION	WEIGHT
SC30HD-ACF	3" CF STYLE ADJUSTABLE CLAMP W/ GASKET HD	8 LBS
SC40HD-ACF	4" CF STYLE ADJUSTABLE CLAMP W/ GASKET HD	10 LBS
SC50HD-ACF	5" CF STYLE ADJUSTABLE CLAMP W/ GASKET HD	15 LBS
SC50ME-ACF	5" CF STYLE ADJUSTABLE CLAMP W/ GASKET ME	19 LBS



TWO-BOLT CLAMP

PART #	DESCRIPTION	WEIGHT
CG30BBD	3" HD TWO BOLT STYLE CLAMP W/ GASKET HD -130 BAR	10 LBS
CG40BBD	4" HD TWO BOLT STYLE CLAMP W/ GASKET HD -130 BAR	12 LBS
CG50BBD	5" HD TWO BOLT STYLE CLAMP W/ GASKET HD -130 BAR	14 LBS



REPLACEMENT GASKETS

SIZE	HD	V-GROOVED	METRIC
1-1/2"	GA15HD	GA15GR	-----
2"	GA20HD	GA20GR	-----
2-1/2"	GA25HD	GA25GR	-----
3"	GA30HD	GA30GR	-----
4"	GA40HD	-----	-----
5"	GA50HD	-----	GA50ME



WELD ON ENDS

PART #	DESCRIPTION	PART #	DESCRIPTION
CWE15HD	1.5" HD END X WELD	CWE15GR	1.5" VIC END X WELD
CWE20HD	2" HD END X WELD	CWE20GR	2" VIC END X WELD
CWE25HD	2.5" HD END X WELD	CWE25GR	2.5" VIC END X WELD
CWE30HD	3" HD END X WELD	CWE30GR	3" VIC END X WELD
CWE40HD	4" HD END X WELD		
CWE50HD	5" HD END X WELD		
CWE50ME	5" METRIC END X WELD		
CWE60HD	6" HD END X WELD		



HD ADAPTER X NPT

PART #	DESCRIPTION	THREAD
CA-150-HD-NPT	1-1/2" HD X 1-1/2" MNPT ADAPTER	MALE
CA-200-HD-NPT	2" HD X 2" MNPT ADAPTER	MALE
CA-250-HD-NPT	2-1/2" HD X 2-1/2" MNPT ADAPTER	MALE
CA-300-HD-NPT	3" HD X 3" MNPT ADAPTER	MALE
CA-400-HD-NPT	4" HD X 4" MNPT ADAPTER	MALE
CA-150-HD-FNPT	1-1/2" HD X 1-1/2" FNPT ADAPTER	FEMALE
CA-200-HD-FNPT	2" HD X 2" FNPT ADAPTER	FEMALE
CA-250-HD-FNPT	2-1/2" HD X 2-1/2" FNPT ADAPTER	FEMALE
CA-300-HD-FNPT	3" HD X 3" FNPT ADAPTER	FEMALE
CA-400-HD-FNPT	4" HD X 4" FNPT ADAPTER	FEMALE



WASHOUT ADAPTER HD X HD

PART #	DESCRIPTION
CADR25R20	2-1/2" HD X 2" HD REDUCING WASHOUT ADAPTER
CADR30R25	3" HD X 2-1/2" HD REDUCING WASHOUT ADAPTER
CADR40R30	4" HD X 3" HD REDUCING WASHOUT ADAPTER
CAD50R50M	5" HD X 5" METRIC REDUCING WASHOUT ADAPTER



SAFETY WHIP CHECKS

PART #	BAR	DESCRIPTION	HOSE RANGE
UWB1	14	1/8" X 20" SMALL HOSE-TO-HOSE SAFETY CABLE	1/2" - 1-1/4"
UWA2	14	1/4" X 38" LARGE HOSE-TO-HOSE SAFETY CABLE	1-1/2" - 3"
UWSR1	14	1/8" X 20" SMALL HOSE-TO-TOOL SAFETY CABLE	1/2" - 1-1/4"
UWSR2	14	1/4" X 38" LARGE HOSE-TO-TOOL SAFETY CABLE	1-1/2" - 3"



HIGH PRESSURE AIR HOSE

WIRE-REINFORCED HEAVY DUTY AIR MANIFOLD HOSE

PART #	DESCRIPTION
1082-24-GJM-GJF	1-1/2" X 600 PSI AIR HOSE W/ MALE X FEMALE ENDS- 25/50 FT
1082-24-UH-UH	1-1/2" X 600 PSI AIR HOSE W/ UNIVERSAL ENDS- 25/50 FT
1082-32-GJM-GJF	2" X 600 PSI AIR HOSE W/ MALE X FEMALE ENDS- 25/50 FT
1082-32-UH-UH	2" X 600 PSI AIR HOSE W/ UNIVERSAL ENDS- 25/50 FT



JACKHAMMER 300# HOSE ASSEMBLIES

FOR PNEUMATIC TOOLS ASSEMBLED W/ UNIVERSAL COUPLINGS

PART #	DESCRIPTION
1025-0750R-50-CR	3/4" X 300 PSI RED PNEUMATIC TOOL AIR HOSE - 50 FT
1025-0750Y-50-CR	3/4" X 300 PSI YELLOW PNEUMATIC TOOL AIR HOSE - 50 FT



GOODYEAR

PRESSURE WASHER HOSE ASSEMBLIES

HIGH PRESSURE NON-MARKING HOSE

PART #	DESCRIPTION
1190-0250B-50-I	1/4" X 4350 PSI WASH DOWN HOSE W/ NPT MALES - 50 FT
1190-0250B-100-I	1/4" X 4350 PSI WASH DOWN HOSE W/ NPT MALES - 100 FT
1190-0375B-50-I	3/8" X 4350 PSI WASH DOWN HOSE W/ NPT MALES - 50 FT
1190-0375B-100-I	3/8" X 4350 PSI WASH DOWN HOSE W/ NPT MALES - 100 FT
1190-0500B-50-I	1/2" X 4350 PSI WASH DOWN HOSE W/ NPT MALES - 50 FT
1190-0500B-100-I	1/2" X 4350 PSI WASH DOWN HOSE W/ NPT MALES - 100 FT
1195-0250B-50-I	1/4" X 7250 PSI WASH DOWN HOSE W/ NPT MALES - 50 FT
1195-0250B-100-I	1/4" X 7250 PSI WASH DOWN HOSE W/ NPT MALES - 100 FT
1195-0375B-50-I	3/8" X 7250 PSI WASH DOWN HOSE W/ NPT MALES - 50 FT
1195-0375B-100-I	3/8" X 7250 PSI WASH DOWN HOSE W/ NPT MALES - 100 FT
1195-0500B-50-I	1/2" X 7250 PSI WASH DOWN HOSE W/ NPT MALES - 50 FT
1195-0500B-100-I	1/2" X 7250 PSI WASH DOWN HOSE W/ NPT MALES - 100 FT



3:1 DESIGN FACTOR

WATER BLAST HOSE ASSEMBLIES

FOR HIGH PRESSURE WATER BLASTING & TESTING SERVICES

PART #	DESCRIPTION
1998-0375-50	3/8" X 12,000 PSI WATER BLAST HOSE - 50 FT
1998-0375-100	3/8" X 12,000 PSI WATER BLAST HOSE - 100 FT
1998-0500-50	1/2" X 12,000 PSI WATER BLAST HOSE - 50 FT
1998-0516-50	1/2" X 16,000 PSI WATER BLAST HOSE - 50 FT
1998-0500-100	1/2" X 12,000 PSI WATER BLAST HOSE - 100 FT
1998-0516-100	1/2" X 16,000 PSI WATER BLAST HOSE - 100 FT



2.5:1 DESIGN FACTOR



We welcome you to visit our 112,000 square foot facility in Itasca IL.



Order Entry and Technical Assistance - Our Specialty

**'We Sell
The Good Stuff'**
Why buy anything else?



Unparalleled Personalized Service

Serving the Construction Market for Over 70 Years

Large inventory of bulk hose and coupled assemblies.

ABBOTT RUBBER
COMPANY, INC.

1311 MEACHAM ROAD • ITASCA, IL 60143 • 800.852.1855

E-MAIL sales@abbotrubber.com • WEBSITE www.abbotrubber.com

NAHAD | Safety, Quality
HOSE SAFETY INSTITUTE | & Reliability

ISO 9001:2015 Certified